



ENGINEERED TO BE BETTER

MAINS POWER SENSOR TAP - WALL MOUNTED

The Australian designed and manufactured, *AutoAqua* S38 Wall - Std Battery Power Sensor Tap is suitable for a range of hand washing applications, particularly in public commercial areas that experience high traffic and therefore high usage, meaning conservation of water is of paramount importance. The 6-star WELS rating ensures hygienic bathroom environments for users, delivered economically and in an environmentally sensitive fashion.

The robust construction is complemented with an array of features ensuring consistent performance. The ability to self-range to its environment, the hygienic self-flush performed every 24 - 72 hours, the capability for multiple tap installations from one power source, coupled with its sleek design are just some of what sets the *AutoAqua* S38 Wall - Std Battery Power Sensor Tap apart from similar models in the market..

FEATURES

- Operating range self-initialisation
- Accessories available for multiple tap installations from one power source
- Spray type flow controller for economical water usage
- Auto Hygienic Self Flush every 24-72 hours
- Dual stage water filters to avoid solenoid blockages
- Optional remote control for adjustment from factory settings
- Available with different flow control options with economical, regular, and healthcare.



Order Code: 100-0193


: 100-0193_REG : 100-0193_HC

: 100-0193_MB

: 100-0193_REG_MB

: 100-0193_PRJ

TYPICAL DIMENSIONS

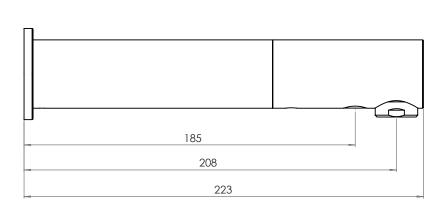











ENGINEERED TO BE BETTER

MAINS POWER SENSOR TAP - WALL MOUNTED

TECHNICAL SPECIFICATIONS

- TAP BODY Solid brass chrome plated
- SENSOR RANGE 120mm factory set
- OPERATING SUPPLY 12v Power Pack
- OPERATING PRESSURE 50 to 500kPa
- RUN TIME Continuous 2 minutes max.
- SOLENOID Latching/soft closing, brass body
- MAX TEMPERATURE 50°C













TYPICAL INSTALLATION

(1) (2) Depending on model particular aerator type is installed. (5) MINIMUM HEIGHT ABOVE BASIN 280mm - ceramic 380mm - stainless steel In situations where water pressure to solenoid exceeds 500kPa a PRESSURE LIMITING pressure limiting valve must be installed. (not supplied) VALVE 500kPa COLD STOP TAP HOT STOP TAP

COMPONENTS SUPPLIED

	Item Code	Description
	item code	Description
1	300-5120	S38 Wall - Std body with sensor
2	300-5122	S38 Wall mounting kit
3	300-0110	6V Solenoid Valve
4	300-0202	6V Battery Pack
5	600-0147	M10 to ½"BSP flex 500mm (1)
6	600-0133	½" BSP M/M nipple C/P (2)

*Battery version available. Order Code: 100-0194 *Surface finish variations available on special order Conditions Apply



Autoflo, AutoAqua and their logos are registered trademarks.

DESIGNED AND MANUFACTURED IN AUSTRALIA TO WORLD STANDARD

TEMPERING VALVE